


1-PORT POWER OVER ETHERNET INJECTOR GGM POEINJV2

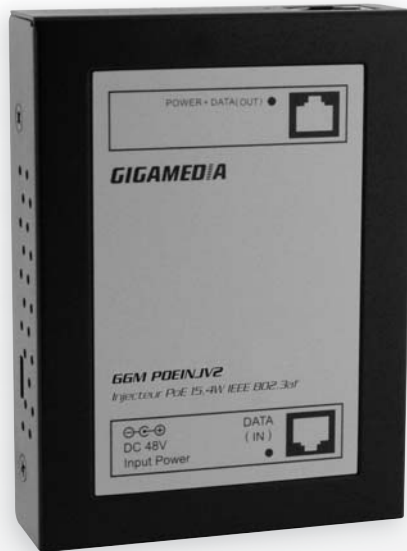

1 Ethernet Input Port
10/100 (Data only)

1 Ethernet Output Port
10/100 (Data + power)

Compliant
with IEEE 802.3af

Smart Plug and Play

GGM POEINJV2 is 1 Ethernet Input (data only) port and 1 Output (data + power) port Power over Ethernet Injector that is designed for small or medium network environment to strengthen its network connection. This product can convert standard 12-24 V/DC or 48 V/DC power into DC voltage that runs over existing LAN cable to power up IEEE 802.3af compliant network accessories. It also features PoE awareness to verify whether the network device receive power is IEEE 802.3af compliant, or only the data will be sent through LAN cable. By adding **GGM POEINJV2** to existing networking, installing networking products such as Access Points and IP cameras can be easily managed and set up. Wireless device deployments are easily located with available power outlets and network administrators don't need to use heavy AC power adapters anymore.

MAIN FEATURES

- 1 Ethernet Input Port (data only)
- 1 Ethernet Output Port (data + power)
- Compliant with IEEE 802.3af
- Smart Plug and Play
- 12-24 V/DC or 48 V/DC input

NO SPECIAL NETWORKING CABLE REQUIRED

By adding PoE devices, you can use an existing standard Cat-5 Ethernet cable to deliver both power and data where power source is difficult to obtain. It helps you reduce installation time and cost.

Using the pairs 1-2/3-6 to deliver the PoE supply.

PRODUCT SPECIFICATION

STANDARDS

IEEE-802.3af
IEEE 802.3 10BaseT
IEEE 802.3u 100BaseTX

FEATURES

Number of Ports 1 Ethernet Input (data only) Port
1 Ethernet Output (data + power) Port
10/100

LED

Per Port PoE Act/Status
Per Unit Power

POWER INPUT

12-24 V DC or 48 V DC Input

POWER OUTPUT

48 V DC at Full 15.4 W Output Supported
Power supply 220 V included

POWER CONSUMPTION

15.4 W (Max)

DIMENSIONS

102 x 75 x 23 mm (L x W x H)

WEIGHT

0.28 kg

OPERATING TEMPERATURE

0 to 50 °C

STORAGE TEMPERATURE

-20 to 85 °C

HUMIDITY

10 to 90% RH (non-condensing)

CERTIFICATIONS

FCC Class A, CE

WARRANTY

1 year

YOUR POINT OF CONTACT