


1-PORT IEEE 802.3AT POE + INJECTOR GGM POEINJPLUS

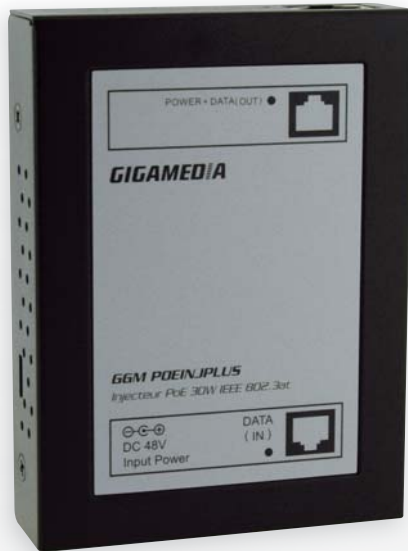

1 Ethernet Input Port
(Data only)

1 Ethernet Output Port
(Data + Power)

Compliant
with IEEE 802.3at

Smart Plug and Play

GGM POEINJPLUS is 1 Gigabit Ethernet Input (data only) port and 1 Output (data + power) port Power over Ethernet Injector that is designed for small or medium network environment to strengthen its network connection.

This product can convert standard power into low-voltage DC that runs over existing LAN cable to power up IEEE 802.3at compliant network accessories. It also features PoE awareness to verify whether the network device receive power is IEEE 802.3at compliant, or only the data will be sent through LAN cable. By adding **GGM POEINJPLUS** to existing networking, installing networking products such as Access Points and IP cameras can be easily managed and set up. Wireless device deployments are easily located with available power outlets and network administrators don't need to use heavy AC power adapters anymore.

NO SPECIAL NETWORKING CABLE REQUIRED

By adding PoE devices, you can use an existing standard Cat-5 Gigabit Ethernet cable to deliver both power and data where power source is difficult to obtain. It helps you reduce installation time and cost.

HIGH POWER PSE POWER INJECTOR

GGM POEINJPLUS is a high power, PSE Power Injector for use in Power over Ethernet systems. The internal current limit and short-circuit protection are designed to provide up to 25W of PSE output power for power hungry PoE applications such as WAPs, security cameras and RFID readers.

PRODUCT SPECIFICATIONS

STANDARDS

IEEE 802.3af
 IEEE-802.3at
 IEEE 802.3 10BaseT
 IEEE 802.3u 100BaseTX

FEATURES

Number of Ports 1 Ethernet Input (data only) Port
 1 Ethernet Output (data + power) Port

LED INDICATORS

Per Port PoE Act/Status
Per Unit Power

POWER INPUT

48 V DC

POWER OUTPUT

48 V DC at Full 25 W Output Supported
 Power supply 220 V included

POWER CONSUMPTION

30 W (max)

DIMENSION

102 x 75 x 23 mm (L x W x H)

WEIGHT

0.28 kg

OPERATING TEMPERATURE

0 to 40 °C

STORAGE TEMPERATURE

-20 to 85 °C

HUMIDITY

10 to 90% RH (non-condensing)

CERTIFICATIONS

FCC Class A, CE

WARRANTY

12 months

PART NUMBER

P/N	DESCRIPTION
GGM POEINPLUS	1-port IEEE 802.3at PoE+ Injector

