

VANDALPROOF DOME CAMERA 2MP GGM ND2VBA



2MP

RESOLUTION
1920 X 1080



POE

IR

IR
10M



VANDALPROOF
IK10

IP67

PROTECTION
IP67

Full HD
2-Megapixels (1920 x 1080)

Triple codec
H264, MPEG-4 & MJPEG

PoE

IR LED up to 10 m

Vandalproof IK10


IP67

The IP camera **GIGAMEDIA ND2VBA** is a vandalproof dome camera with a resolution of 2 Megapixels in H264. A vari-focal 3.3-10.5 mm is integrated to adjust the angle of view on the field and also to be adaptable easily to installation constraints. Built in with IR LEDs embedded for a distance up to 10 m, it will permit to have a night vision in a complete dark scene. IP67 rated, this camera can be installed in outdoor and resist for temperature up to -20 °C. ONVIF compliant, the **ND2VBA** can be integrated easily in third part videosurveillance software and NVR supporting ONVIF.

The **ND2VBA** is an IP megapixel outdoor dome camera which will help you to solve challenges for outdoor surveillance such as parking lot, building, or industrial surveillance ...

PRODUCT FEATURES

- Resolution up to 2 Megapixel (1920 x 1080) Full HD
- Double stream MJPEG / MPEG4 / H264 Codec
- ONVIF
- PoE or 12 V DC Power supply
- 1x DI & 1x DO
- IR LED up to 10 m
- Micro SD/SDHC card slot
- VandalProof
- IP67

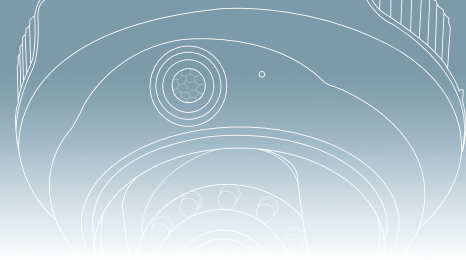


PRODUCT SPECIFICATION

SYSTEM	
Processor	533 MHz
Flash	32 MB
RAM	256 MB
SENSOR	
	1/2.5 inch CMOS 3MP
Shutter	1/2 - 1/20000 sec
LENS	
	Vari-focal lens f = 3.3-10.5 mm F1.4 (Auto iris F1.4)
Angle of view	Horizontal: 105.6°-30.4° Vertical: 79, 2°-22.8° Diagonal: 132°-38° Auto IRIS DC Drive ICR cut filter
Illum. mini.	12x LED IR 850 nm 40° up to 10 m 0 lx (IR ON) / 0,5 lx (without IR)
VIDEO	
	Auto Exposure control / Auto White Balance / Auto Gain control Manual Exposure control / Manual Gain Control / Manual White Balance Control S/N ratio
Compression	Codec MJPEG / MPEG-4 / H264
MULTI PROFILE MANAGEMENT	
	Day / Night / Sunset / User 1 / User 2

RESOLUTION	
	1920 x 1080
H264	30 fps en 1920 x 1080
MPEG4	30 fps en 1920 x 1080
MJPEG	30 fps en 1920 x 1080
AUDIO	
	2 way audio / Input for microphone output for speaker
Compression	G711 / AMR
NETWORK	
Ethernet	1x RJ45 10/100 Mbps
Protocols	TCP/IP, UDP, ICMP, DHCP, NTP, DNS, DDNS, SMTP, FTP, HTTP, SAMBA, PPPoE, UPnP, RTP, RTSP, RTCP, IPv6
INTERFACE	
	Micro SD/SDHC card slot max 32 GB Power connector DC 12 V Port RJ45 Reset button 1x DI & 1x DO 1x RS485
EVENTS AND ALARMS MANAGEMENT	
Events	Motion detection / Schedule / Audio detection
Alarm	Stream / Snapshot to FTP / Email / Samba / SD-CARD / HTTP / Email Notification

LEDS INDICATION	
	Power / Internet
Power input	12 V DC / 1 A (power supply not included) PoE 802.3af
OPERATING SYSTEM	
	OS Windows XP or above Internet explorer 7 or above
ENVIRONMENT	
Certification	CE / FCC / IP67 / VandalProof (IK10)
Operating T°	-20 °C to 50 °C
Humidity	10% - 80%
Consumption	
Dimension	155.1 (D) x 177.4 (H) mm
Weight	1.49 kg
WARRANTY	
	1 year

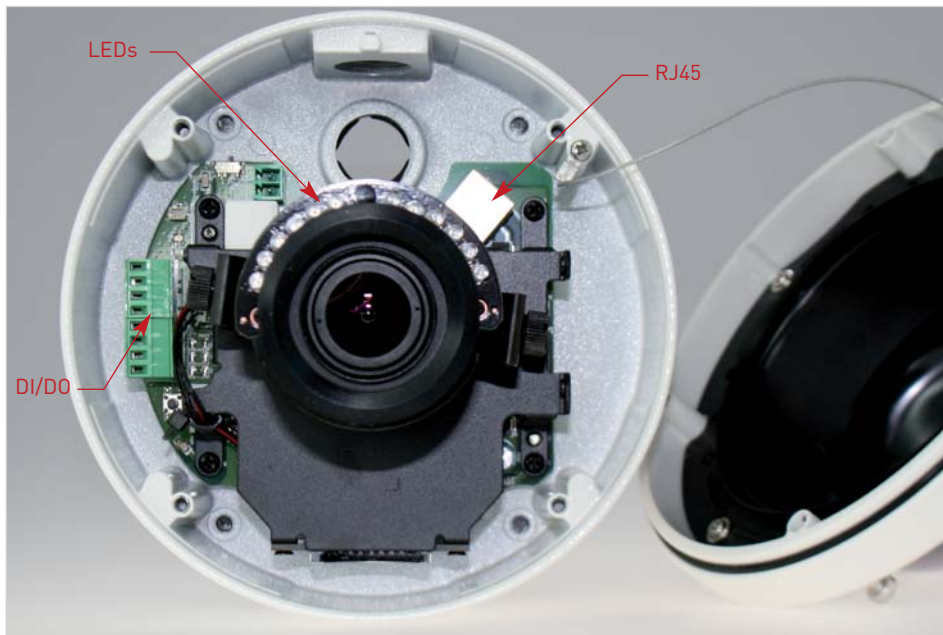

YOUR POINT OF CONTACT