

BULLET CAMERA 3MP H264 GGM NT3VB



3MP

RESOLUTION
2032 X 1536



PoE

IR

IR
15M

Full HD
3-Megapixels (2032 x 1536)

Triple codec
H264, MPEG-4 & MJPEG

PoE

IR LED up to 15 m

IP66

The IP camera **GIGAMEDIA NT3VB** is a bullet camera with a resolution of 3 Megapixels in H264. A vari-focal 2.8-12 mm is integrated to adjust the angle of view on the field and also to be adaptable easily to installation constraints. Built in with IR LEDs embedded for a distance up to 15 m, it will permit to have a night vision in a complete dark scene. IP66 rated, this camera can be installed in outdoor and resist for temperature up to -20°C. ONVIF compliant, the **NT3VB** can be integrated easily in third part videosurveillance software and NVR supporting ONVIF.

The **NT3VB** is an IP megapixel outdoor bullet camera which will help you to solve challenges for outdoor surveillance such as parking lot, building or industrial surveillance ...

PRODUCT FEATURES

- Resolution 3-Megapixels (2032 x 1536) Full HD
- Simultaneous multiple streams
- H.264 / MPEG-4 / MJPEG compression
- ONVIF compliant
- PoE or 12 V DC power
- 1x DI & 1x DO
- IR LED up to 15 m
- Micro SD/SDHC card slot
- Cable management




PRODUCT SPECIFICATION

SYSTEM	
Processor	533 MHz
Flash	32 MB
RAM	256 MB
SENSOR	
	1/2.5 inch CMOS 3MP
Shutter	1/2 - 1/20000 sec
LENS	
	Integrated fixed lens f= Vari-focal Lens f=2.8-12 mm F1.6-F4.0
Angle of view	Horizontal: 99°-22° Vertical: 59°-13° Diagonal: 124°-28° Auto IRIS DC Drive ICR cut filter
Illum. mini.	35 x LEDs IR 850 nm 60° up to 15 m 0 lx (IR actif) / 0,5 lx (without IR)
VIDEO	
	Auto Exposure control / Auto White Balance / Auto Gain control Manual Exposure control / Manual Gain Control / Manual White Balance Control S/N ratio
Compression	Codec MJPEG / MPEG-4 / H264
MULTI PROFILE MANAGEMENT	
	Day / Night / Sunset / User 1 / User 2

RESOLUTION	
	3M: 2048x1536 @ 20 fps 2M (1080p Full HD): 1920x1080 @ 30 fps 1M (720p HDTV): 1280x720 @ 30 fps
AUDIO	
	2 way audio / Audio input for microphone and audio output for speaker
Compression	G711 / AMR
NETWORK	
Ethernet	1x RJ45 10/100 Mbps
Protocols	TCP/IP, UDP, ICMP, DHCP, NTP, DNS, DDNS, SMTP, FTP, HTTP, SAMBA, PPPoE, UPnP, RTP, RTSP, RTCP, IPv6
INTERFACE	
	Micro SD/SDHC card slot max 32 GB Power connector DC 12 V Port RJ45 Reset button 1x DI & 1x DO 1x RS485
EVENTS AND ALARMS MANAGEMENT	
Events	Motion detection / Schedule / Audio detection
Alarm	Stream / Snapshot to FTP / Email / Samba / SD-CARD / HTTP / Email Notification

LEDS INDICATION	
	Power / Internet
Power input	12 V DC / 1 A (power supply) PoE 802.3af
OPERATING SYSTEM	
	OS Windows XP or above Internet explorer 7 or above
ENVIRONMENT	
Certification	CE / FCC / IP66
Operating T°	-20 °C to 50 °C
Humidity	10% - 80%
Consumption	8 W
Dimension	88(L) x 200(L) x 88(p) mm
Weight	1.88 kg
WARRANTY	
	1 year

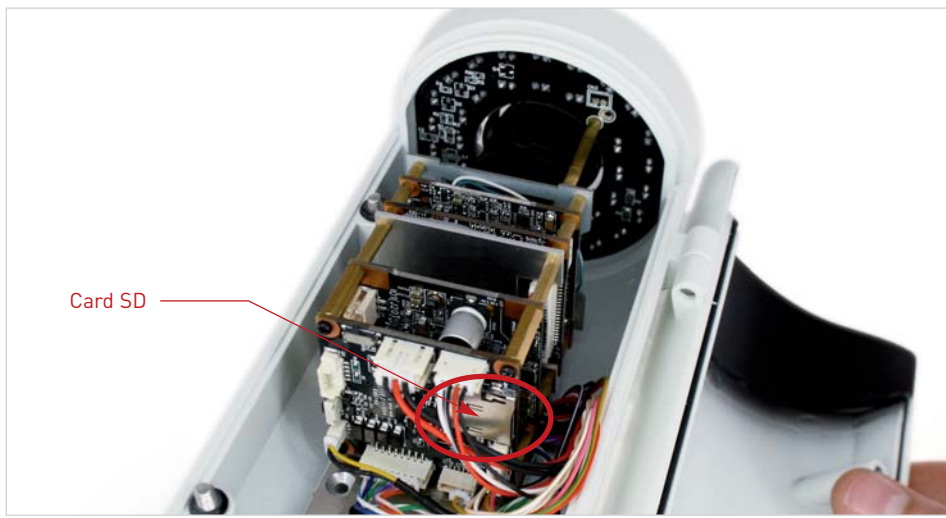

YOUR POINT OF CONTACT

