

CCTV CONTROLER 3 AXIS FOR PTZ DOME

GGM CCKB3DP26



JOYSTICK
3 AXIS



DISPLAY
LCD



CONNEXION
RS485



CONTROL UP TO
255 ADDRESSES


Control keyboard is the indispensable rear-end control device in integrated security system, it is specially designed for the quick control of speed dome camera and PTZ which are unable to control conveniently through DVR, let the actual control person control the front end more easily. Thanks to support for multiples protocols, this joystick is compliant with the majority of cameras in the market, especially with GIGAMEDIA product GGMANP18X, GGMANP26X, GGMANP36X and GGMCCZ340.

SPECIFIC FEATURES

- Display the current control address's agreement and baud-rate real time
- Refurbish the firmware program on line
- Maximum sub-control : 16

MAIN FEATURES



- Design to control dome cameras (Pan, tilt, zoom, speed, focus)
- RS 485 half duplex interface, control up to 255 addresses in front end and 128 in parallel
- All input and output communication port use anti-radar design, powerful anti-jamming -performance, the standard transmitting distance is 1200 meters
- Keyboard operation password on/off/lock function
- Joystick 3 axis comfortable and ergonomic
- LCD display

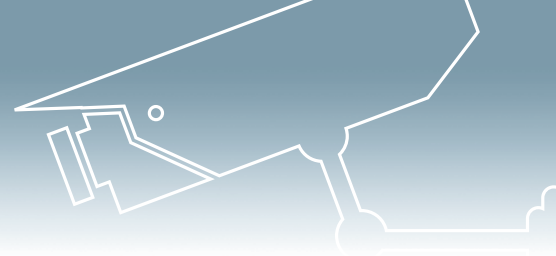

PRODUCT SPECIFICATIONS

MODEL	GGM CCKB3DP26	CASCADE CONNECTION NUMBER	16 sub-control, Controller ID:0-15	OPERATING TEMPERATURE:	0°C to 50°C
INTERFACE MODE	5 PIN pressing line port	LANGUAGE	English	STORAGE TEMPERATURE	-20°C to 70°C
PROTOCOL	Pelco D Pelco P, Panasonic, Hikvision, etc	KEYBOARD	3 Axis with 23 keys and 3 button menu	DIMENSION (MM)	335 x 190 x 135 mm
COMMUNICATION MODE	RS485 Half Duplex	KEY TONE	Bip on/off	WEIGHT (KG)	1.3 Kg
BAUD RATE	1200, 2400, 4800, 9600, 19200 bauds	POWER SUPPLY	12 VDC external power supply (delivered with the product)	WARRANTY	2 years
CONTROL ADDRESS	Control 255 dome camera, decodr at most, address code: 0-254	CONSUMPTION	6W MAX		

DIMENSIONS

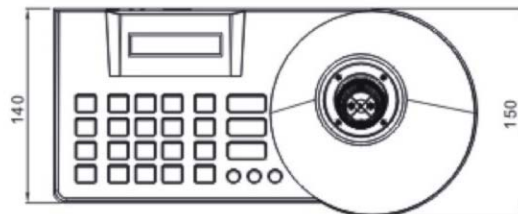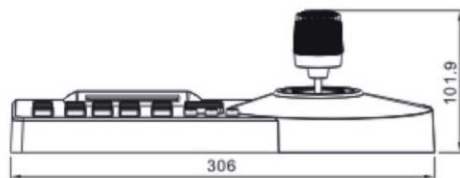

3D

Unit: mm

YOUR POINT OF CONTACT