



## INDOOR EYEBALL DOME CAMERA 700TVL PLASTIC GGM CCDE712F3P



**700  
TVL**  
RESOLUTION  
700 TVL

**0,1  
LUX**  
SENSIBILITY  
0,1 LUX

**INFRARED  
20M**  
INFRARED  
20M

CMOS Aptina MT9V139

Sensibilité 0,1 Lux

Infrared 20m

Day / Night

The **GGM CCDE712F3P** is equipped with 1/4" CMOS Aptima sensor to give an excellent picture quality. It's a real night and day camera with physical IR cut Filter embedded. Installation is quick and easy, the camera come completely assembled and ready to use. The **GIGAMEDIA CCDE712F3P** exceed a resolution of 700TVL and delivers a crystal clear images and capable of illuminating a subject up to 20 m at night. The **GGM CCDE712F3P** is really suited for commercial security with easy ceiling installation.

### MAIN ASSETS

- Sensor 1/4" CMOS
- Minimum résolution 700 TVL
- Eyeball type (small size = 76x92.5 mm)
- Plastic covert
- Excellent value for money
- With Mechanical ICR, true Day/Night
- High sensitivity, no chromatic aberration



## PRODUCT SPECIFICATIONS

### VIDEO

Image sensor	1/4" CMOS Aptima
DSP	Aptima MT9V139 + FH8510 800TVL
Signal	Pal
Effective pixels	728(H) x 560(V)
Resolution	800 TVL
Minimum illumination	0.1lux@F1.2
Day/night System	Auto Color to B/W Switch
S/N Noise	≥48dB
Vidéo Output Level	1.0Vp-p 750Ω BNC
Gamma Correction	0.45
Exposure mode	EE (Electronic Exposure)
Electronic Shutter	PAL = 1/50 à 1/100 000 secondes
Synch.System	Internal Synchronisation

### OPERATIONAL

AGC (Gain /Control)	Auto
White balance	Auto
OSD	Support

### LENS

Lens Type	Fixed lens 3.6mm
Lens Mount	M12
IR Leds (850 nm)	24 pcs infrared 20 m (Theoric distance) Angles of view horizontal : 74° Vertical : 55°

### ELECTRICAL

Voltage	DC12V +/-5%
Power consumption	Leds OFF < 100mA Leds ON < 250mA ( Approx. ≤6W )

### PHYSICAL

Case Material	Plastic (Indoor use only !)
Working temperature	-30° à +50°C
Working Humidity	10% to 85%
Dimensions	72 x 92.5 mm
Net weight	230g



### WARRANTY

2 years

### ACCESSORIES

GGM CC12V1A	Standalone Power Supply 1 output 12 VDC 1 A
GGM CC1205P4	Power supply 4 output 12 VDC 5 A
GGM DVR41T0	DVR 4 channel BNC + 1 To
GGM DVR81T0	DVR 8 channel BNC + 1 To
GGM DVR16	DVR 16 channel BNC (without hard drive included)
GGM CCDOMPLAQ	Metal Ceiling Plate for dome camera

### DIMENSIONS (MM)

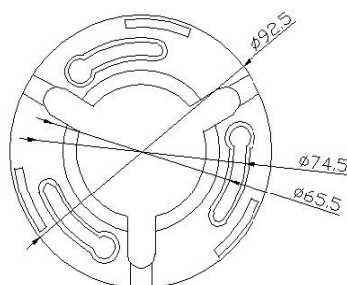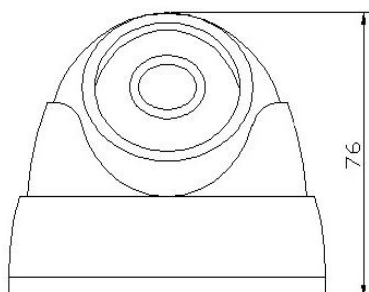

Your Contact