



INDOOR DOME CAMERA HIGH DEFINITION 700TVL VARI-FOCAL
GGM CCDE713VWO



700 TVL <small>RESOLUTION 700 TVL</small>	0,1 LUX <small>SENSIBILITY 0,1 LUX</small>	 <small>INFRARED 30M</small>	 <small>FOCAL LENGTH 2,8-12MM</small>	SONY Effio <small>CHIPSET SONY Effio-E3</small>
---	--	--	---	---

Resolution 700 TVL

0,1 Lux

IR 30m

Focal Length
2,8-12mm

DSP Effio-E3

The **GGM CCDE713VWO** is equipped with the latest Sony Effio chipset to get an excellent picture quality coupled with CCD HAD Sony sensor. Installation is quick and easy, the camera come completely assembled and ready to use. The GIGAMEDIA **GGM CCDE713VWO** achieves a resolution of 700TVL and delivers a crystal clear images and capable of illuminating a subject up to 30m at night. The **GGM CCDE713VWO** is really suited for commercial security and with easy ceiling installation. The OSD system improve quality image (brightness, lighting..) and bring user possibility to protect private life with 9 configurable private masking.

MAIN FEATURES

- DSP Effio-E3
- Dome eyeball housing
- Resolution 700 TVL
- OSD control
- Infrared distance 30m
- Metal case (housing)
- Focal Length 2.8-12mm
- 9 private masking zones

OSD control system





PRODUCT SPECIFICATIONS (GGM CCDE7I3VW0)

VIDEO

Image Sensor	SONY Super HAD CCD
Chipset	SONY EFFIO-E3 4127 + 673
Type	Color, B/W (auto- B/W)
Horizontal Resolution	700 TVL
Total Pixel	PAL : 976H x 582V NTSC : 976H x 494V
Min. Illumination	0,1Lux (0Lux Led on)
Iris	1/50 (1/60) 1/100000
Video Output	1.0Vpp ; 75ohms BNC
Backlight Compensation	BLC (9 Zone is adjustable) / HLC / OFF
AGC	High /low (5dB-62.8dB)
White balance	ATW / PUSH / Manual / Hold / Fixed gain/Color rolling suppression
S / N Ratio	+ de 58dB
Gamma	0 ,45
Focal Length	2.8-12mm (101,19°-28,16°)
IR distance	Infrared distance : 30m Working angle : 60°
IR type	850nm
Number of leds embedded	36

MECHANICAL

Material – housing	Metal
Color	Grey /black
Dimensions	Following the drawing below

ENVIRONMENTAL

Operation Temperature	-20°C to +60°C
Certifications	CE, FCC


WARRANTY

2 years

ACCESSORIES (OPTIONAL)

GGM CC12V1A	Power supply 1 out 12VDC 1A
GGM CC1205P4	Power supplies 4 out 12VDC 5A
GGM DVR41T0	DVR 4 channels BNC + 1T0
GGM DVR81T0	DVR 8 channels BNC + 1T0
GGM DVR16	DVR 16 channels BNC (without hard drive)


DIMENSIONS (MM)



ELECTRICAL

Input Voltage / Current	12VDC
Power Consumption	70 mA/310 mA (leds on)
Power supply	12VDC (non included)

SETTINGS FOCAL LENGTH (FOCUS AND ZOOM)

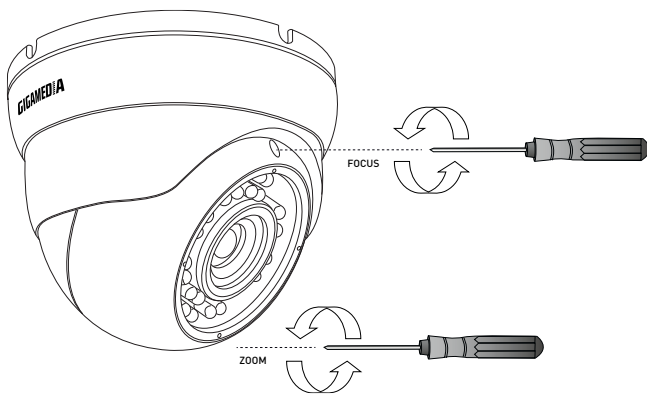

OSD FEATURES



System information



Private masking



Motion detection

YOUR POINT OF CONTACT

