



PLASTIC CASE 22" CCTV LCD MONITOR RESOLUTION 1680 X 1050  
GGM CCMLCD22PP



BRIGHTNESS  
300 CD/M<sup>2</sup>



ASPECT RATIO  
16/10



RESOLUTION  
1680 X 1050



CONTRAST RATIO  
1000:1

LCD monitor 22" (56cm)

Resolution 1680 x 1050

Plastic case

Aspect ratio 16/10

**INTERFACES :**

- HDMI/IN x1
- BNC/IN x2
- BNC/OUT x1
- VGA/IN x1

GIGAMEDIA LCD monitor generates crisp lines and images. Monitor GIGAMEDIA GGM **CCMLCD22PP** offer VGA, HDMI and BNC inputs. Fast response time provides superior clarity with 16/10 aspect ratio to avoid image stretching for real CCTV camera.

This LCD monitors are designed specifically for use in security applications. The GIGAMEDIA **CCMLCD22PP** are perfect LCD monitors for those looking for an excellent investment with good value for money display system. With a 1000:1 contrast ratio, 300cd/m<sup>2</sup> brightness and a 5ms response time, the GIGAMEDIA **CCMLCD22PP** has a small footprint when desk space is at a premium. The standard and unique look of **CCMLCD22PP** make it the perfect display solution for any modern environment like office, shop, hotel ...

**MAIN  
FEATURES**

- Aspect Ratio / Real 16/10
- Contrast Ratio 1000:1
- Horizontal Viewing Angle 160°
- Brightness 300cd/m<sup>2</sup>
- VESA 100mm



## PRODUCT SPECIFICATIONS

### CHARACTERISTIC

<b>Model</b>	GGM CCMLCD22PP
<b>Panel size</b>	22" (56cm)
<b>Housing</b>	Plastic
<b>Active display area</b>	476 (W) x 298mm (H)
<b>Display mode</b>	16/10
<b>LCD Type</b>	TFT-LCD
<b>Resolution</b>	1680x1050
<b>Max Display Color</b>	16,7M
<b>Pixel Pitch (mm)</b>	282 (H) x 0.282 (V)
<b>Brightness (nits)</b>	300cd/m <sup>2</sup>
<b>Contrast ratio</b>	1000:1
<b>View angle (H/V)</b>	160°/160°
<b>Response time</b>	5ms
<b>V-Frequency</b>	60Hz
<b>Backlight</b>	CCFL

### INPUT AND OUTPUT

<b>Interface</b>	D-Sub15 pin(VGA X1), HDMI x 1
<b>Composite video</b>	2 x BNC in 1 x BNC out
<b>PIP</b>	No

### VIDEO

<b>System</b>	PAL / NTSC / SECAM
---------------	--------------------

### OSD DISPLAY

<b>Menu</b>	English / French
<b>OSD Control</b>	Auto adjust, Brightness, Contrast, Hori. / Vert. Position, Clock, phase, Color


### POWER

<b>Power input</b>	12VDC / 4A (external power supply included)
<b>Max in operation</b>	≤ 45W (max)
<b>Standby power loss</b>	< 1W

### MOUNT WAY

<b>Mounting</b>	VESA 100mm
-----------------	------------

### DIMENSIONS (MM)

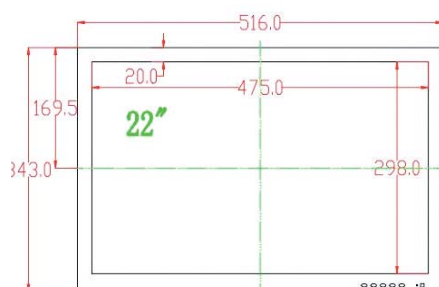


### OTHERS

<b>Warranty</b>	2 years
<b>Accessories supplied</b>	User's guide - power supply - (VGA Câble 1,5m) - Remote control - Stan- dard desk bracket
<b>Operating temperature</b>	-10° to 65°
<b>Operating humidity</b>	20% - 90% (max)
<b>Storage temperature</b>	-10° to 65°
<b>Storage humidity</b>	20% - 90% (max)
<b>Net weight</b>	7kg

### ACCESSORIES (NON INCLUDED)

<b>GGM CORDHDMI10M</b>	Cord video HDMI 1.4 high speed 10m
<b>GGM CORDHDMI5M</b>	Cord video HDMI 1.4 high speed 5m
<b>GGM CORDHDMI2M</b>	Cord video HDMI 1.4 high speed 2m

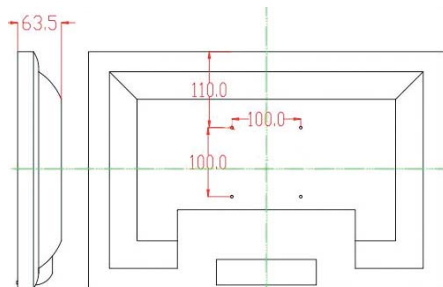

## ACCESSORIES INCLUDED



REMOTE CONTROL



POWER SUPPLY



USER  
MANUAL



VGA CABLE  
(1,5M)

### YOUR POINT OF CONTACT

