




MONITOR LCD 26" METAL CASE RESOLUTION 1366 X 768
GGM CCMLCD26PM



BRIGHTNESS
450 CD/M²



ASPECT RATIO
16/9



RESOLUTION
1366X768



CONTRAST RATIO
3000:1



FUNCTION
PIP

Monitor LCD 26" 66cm

Resolution 1366x768

PIP Function

Metal Frame

Display area 16/9

INTERFACES:

- Input HDMI x1
- Input VGA x1
- Input BNC x5
- Input DVI x1
- Input (Y Pb Pr) x1 (BNC)
- Input/output 1/1 RS232 (test)
- Output BNC x 2 (Looping)

GIGAMEDIA LCD monitor generates crisp lines and images. Monitor GIGAMEDIA **GGM CCMLCD26PM** offer VGA, HDMI, VDI and BNC inputs. Fast response time provides superior clarity with Full HD 1366x768 aspect ratio to avoid image stretching. This LCD monitors are designed specifically for use in security applications.

The GIGAMEDIA **GGM CCMLCD26PM** are perfect LCD monitors for those looking for an excellent investment with good value for money display system. with a 3000:1 contrast ratio, 450cd/m² brightness and a 8ms response time, the GIGAMEDIA **GGM CCMLCD26PM** has a small footprint when desk space is at a premium. The standard and unique look of **GGM CCMLCD26PM** make it the perfect display solution for any modern environment like office, shop, hotel ...

MAIN FEATURES

- Monitor LCD 26"
- Metal Frame
- OSD + PIP
- Resolution 1366 x 768
- Brightness 450 cd/m²
- Viewing angle (H) 178°: 178° (V)
- VESA 100-150mm
- Contrast ratio 3000 :1
- Display area 16/9



PRODUCT SPECIFICATIONS

CARACTERISTICS

Model	GGM CCMLCD26PM
Panel	Size 26"
Active display area	575.6 x 323.5mm (W x H)
Display area	16/9
LCD type	TFT-LCD
Resolution	1366 x 768
Max display color	16.7M
Pixel pitch (mm)	0.4215 (H) x 0.4215 (V)
Brightness (nits)	450 cd/m ²
Contrast Ratio	3000:1
Viewing angle	178°/178°
Response time	8ms
Backlight	LED /CCFL
V-Frequency	60Hz

INPUT & OUTPUT

Composite video input 3 (BNCx3) / 5 (BNCx5)
 Y,Pb,Pr/Y,Cb,Cr input 1 (BNCx3)
 S-video input 1 (BNCx2)
 VGA input 1
 DVI input 1
 Composite video output 2 (BNCx2)
 HDMI input 1
 RS232 Control mouth input and output RJ45x2

MENU OSD

Menu English / French
 OSD Control
 Auto adjust, Brightness, Contrast,
 Hori. / Vert. Position, Clock, Phase, Color
 PIP Function

POWER

Power input AC100V-240V, 50/60Hz
 Max in operation ≤ 110W (max)
 Standby power loss < 5W


OTHERS

Support VESA 100 & 150mm (Need special wallmount bracket, please contact our sales team)
 Standard desk bracket (included)
 Remote control Yes
 VGA cable 1.5m (included)
 Net weight 12kg
 Dimensions 639.6 x 393 x 113.2mm
 Operating T° -10° to 65°
 Operating humidity 20% - 90% (max)
 Storage T° -10° to 65°
 Storage humidity 20% - 90% (max)
 Certification CE,ROHS
 Warranty 2 years


ACCESSORIES (NON INCLUDED)

GGM CORDHDMI10M	Cord video HDMI 1.4 high speed 10m
GGM CORDHDMI5M	Cord video HDMI 1.4 high speed 5m
GGM CORDHDMI2M	Cord video HDMI 1.4 high speed 2m

DIMENSIONS (MM)

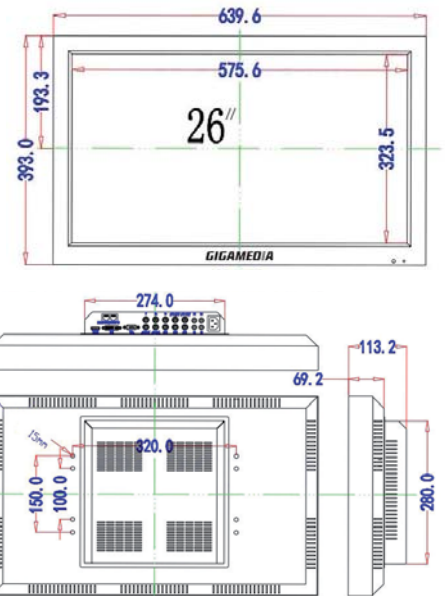

BACK PANEL

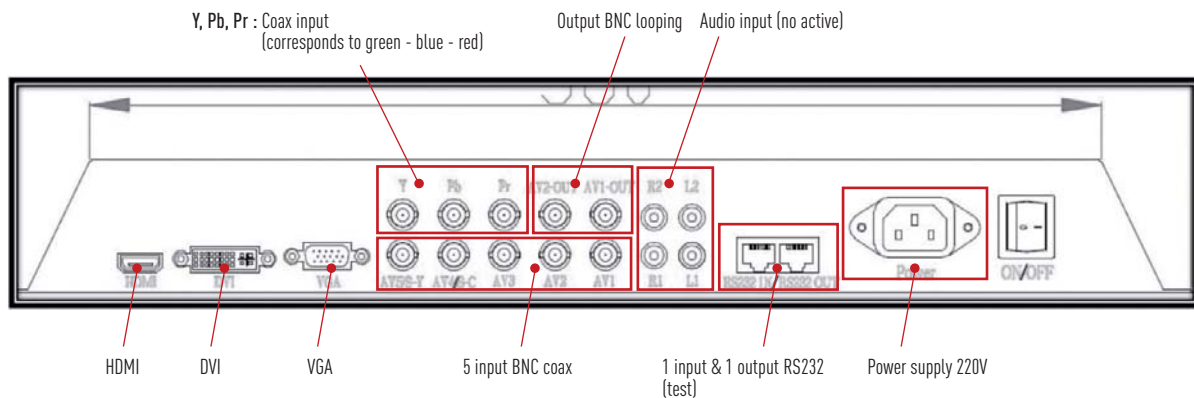

ACCESSORIES INCLUDED



REMOTE CONTROL



INTERNAL POWER SUPPLY



USER MANUAL



VGA CABLE (1,5M)

YOUR POINT OF CONTACT

