




MONITOR LCD 42" METAL CASE FULL HD 1920 X 1080
GGM CCMLCD42PM



BRIGHTNESS
400 CD/M²



ASPECT RATIO
16/9



RESOLUTION
1920 X 1080



CONTRAST RATIO
4000:1



FUNCTION
PIP

Monitor LCD 42" 107cm

FULL HD 1920 x 1080

PIP Function

Metal Frame

Display area 16/9

INTERFACES:

- Input HDMI x1
- Input VGA x1
- Input BNC x5
- Input DVI x1
- Input (Y Pb Pr) x1 (BNC)
- Input/output 1/1 RS232 (test)
- Output BNC x 2 (Looping)

GIGAMEDIA LCD monitor generates crisp lines and images. Monitor GIGAMEDIA **GGM CCMLCD42PM** offer VGA, HDMI, VDI and BNC inputs. Fast response time provides superior clarity with Full HD 1920x1080 aspect ratio to avoid image stretching. This LCD monitors are designed specifically for use in security applications.

The GIGAMEDIA **GGM CCMLCD42PM** are perfect LCD monitors for those looking for an excellent investment with good value for money display system. with a 4000:1 contrast ratio, 400cd/m² brightness and a 6.5ms response time, the GIGAMEDIA **GGM CCMLCD42PM** has a small footprint when desk space is at a premium. The standard and unique look of **GGM CCMLCD42PM** make it the perfect display solution for any modern environment like of-fice, shop, hotel ...

MAIN FEATURES

- Monitor LCD 42"
- Metal Frame
- OSD + PIP
- Resolution 1920 x 1080
- Brightness 400 cd/m²
- Viewing angle (H) 178° : 178° (V)
- VESA 150-200mm
- Contrast ratio 4000 :1
- Display area 16/9



PRODUCT SPECIFICATIONS

CARACTERISTICS

Model	GGM CCMLCD42PM
Panel	Size 42"
Active display area	930.2 x 523.0mm (W x H)
Display area	16/9
LCD type	TFT-LCD
Resolution	1920x1080
Max display color	16.7M
Pixel pitch (mm)	0.4845 (H) x 0.4845 (V)
Brightness (nits)	400 cd/m ²
Contrast Ratio	4000:1
Viewing angle	178°/178°
Response time	6.5ms
Backlight	LED /CCFL
V-Frequency	60Hz

INPUT & OUTPUT

Composite video input 3 (BNCx3) / 5 (BNCx5)
 Y,Pb,Pr/Y,Cb,Cr input 1 (BNCx3)
 S-video input 1 (BNCx2)
 VGA input 1
 DVI input 1
 Composite video output 2 (BNCx2)
 HDMI input 1
 RS232 Control mouth input and output RJ45x2

MENU OSD

Menu English / French
 OSD Control
 Auto adjust, Brightness, Contrast,
 Hori. / Vert. Position, Clock, Phase, Color
 PIP Function

POWER

Power input AC100V-240V, 50/60Hz
 Max in operation ≤ 150W
 Standby power loss < 5W

OTHERS


Support VESA 150 & 200mm (Need special wallmount bracket, please contact our sales team)
 Standard desk bracket (included)

Remote control Yes
 VGA cable 1.5m (included)
 Net weight 25kg
 Dimensions 996.6 x 596 x 119.2mm
 Operating T° -10° to 65°
 Operating humidity 20% - 90% (max)
 Storage T° -10° to 65°
 Storage humidity 20% - 90% (max)
 Certification CE,ROHS
 Warranty 2 years


ACCESSORIES (NON INCLUDED)

GGM CORDHDMI10M	Cord video HDMI 1.4 high speed 10m
GGM CORDHDMI5M	Cord video HDMI 1.4 high speed 5m
GGM CORDHDMI2M	Cord video HDMI 1.4 high speed 2m

DIMENSIONS (MM)

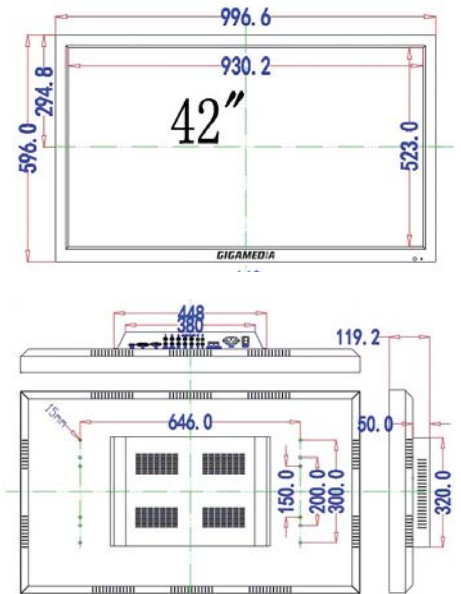

BACK PANEL

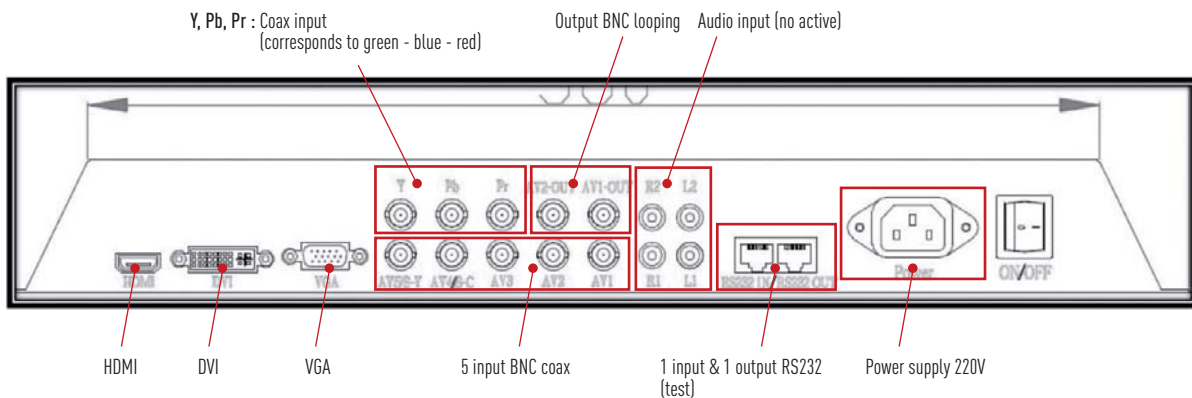

ACCESSORIES INCLUDED



REMOTE CONTROL



INTERNAL POWER SUPPLY



USER MANUAL



VGA CABLE (1,5M)

YOUR POINT OF CONTACT

